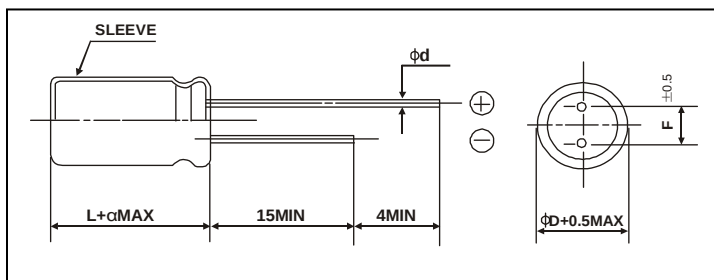


L7 series**+105°C, 7mmL Low leakage Current(低漏电流)****◆ FEATURES**

- Extremely low and stable leakage current characteristics.
- Close capacitance tolerance $\pm 20\%$ ($\pm 10\%$)

◆ SPECIFICATIONS

Items	Characteristics						
Category Temperature Rance	-40~+105℃						
Rated Voltage Range	6.3~50V.DC						
Nominal Capacitance Rance	0.1~470μ F						
Capacitance Tolerance	± 20%(120Hz,+20℃)						
Leakage Current(MAX)	I=0.002CV or 0.3(μA) after 2 minutes whichever is greater measured with rated working voltage at 20℃						
Dissipation Factor(MAX) Tanδ (20℃,120Hz)	Rated Voltage(V)	6.3	10	16	25	35	50
	Tanδ	0.24	0.20	0.18	0.16	0.14	0.12
Load Life	After applying rated voltage with max ripple current for 1000 hrs at 105℃,the capacitors shall meet the following requirements						
	Capacitance Change	Within ±20% of the initial value					
	Dissipation Factor	Not more than 200% of the specified value					
Shelf Life	Leakage Current	Not more than the specified value					
	After Leaving capacitors under no load at 105℃ for 1000hrs,they meet the characteristic requirements listed at right						
	Capacitance change	Within ±20% of the initial value					
Low Temperature Stability Impedance Rate(MAX)	Tanδ	≤200% of initial specified value					
	Leakage current	Initial specified value or less					
	Rated Voltage(V)	6.3	10	16	25	35	50
	Z-25℃/Z+20℃	5	4	3	2	2	2
	Z-40℃/Z+20℃	10	8	6	4	3	3
Other	JISC-5141 EIAJ RC-2372						

◆ CASE SIZE TABLE

ΦD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
Φd	0.45	0.5		
α	1.0			

◆ RIPPLE CURRENT MULTIPLIER

Cap(μF)	Frequency(Hz)				
	50	120	300	1K	10K~
≤ 47	0.75	1.0	1.35	1.57	2.0
56~470	0.8	1.0	1.23	1.34	1.5

◆ STANDARD RATINGS

Size: $\Phi D \times L$ (mm)

Voltage Code Cap(μF)		6.3V		10V		16V		25V		35V		50V	
		OJ		1A		1C		1E		1V		1H	
0.1	104											4×7	1.0
0.22	224											4×7	2.3
0.33	334											4×7	3.5
0.47	474											4×7	5
1.0	105											4×7	10
2.2	225											4×7	19
3.3	335											4×7	24
4.7	475											4×7	28
10	106					4×7	28	4×7	28	5×7	32	5×7	38
22	226	4×7	34	4×7	35	4×7	39	4×7 5×7	39 48	5×7	52	6.3×7	58
33	336	4×7	40	4×7	43	4×7 5×7	45 52	5×7	58	6.3×7	65	6.3×7	72
47	476	4×7	48	4×7	45	4×7 5×7	52 65	5×7 6.3×7	62 71	5×7 6.3×7	69 81	8×7	90
100	107	5×7	78	5×7	74	5×7 6.3×7	71 98	6.3×7 8×7	81 115	6.3×7 8×7	101 145	8×9	195
220	227	6.3×7	120	6.3×7	138	6.3×7	186						
330	337	8×9	204	8×7	201	8×9	221						
470	477	8×9	243	8×9	230	8×9	228						

Maximum Allowable Ripple Current(mA rms) at 105°C 120Hz