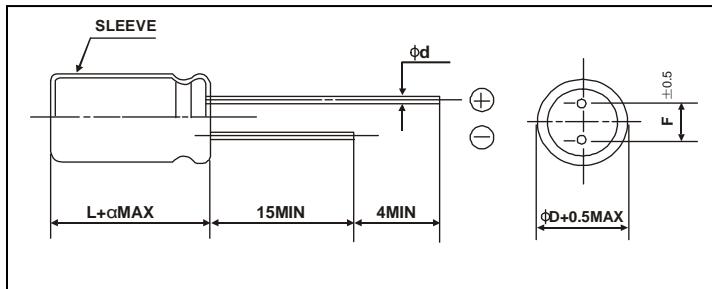


SG series**+85°C, 7mmL(高), Standard(标准品)****◆ FEATURES**

- Rated working voltage range 6.3 to 50V DC Operation temperature range -40 to 85°C.
- This series is for communication equipments, switching power supply, industrial measuring Instruments, automotive electric products, etc

◆ SPECIFICATIONS

Items	Characteristics																											
Category Temperature Range	-40~+85 °C																											
Rated Voltage Range	6.3~50V.DC																											
Nominal Capacitance Range	0.1~470μF																											
Capacitance Tolerance	±20%(120Hz,+20°C)																											
Leakage Current(MAX)	I=0.01CV or 3(uA) after 2 minutes whichever is greater measured with rated working voltage at 20°C																											
Dissipation Factor(MAX) Tanδ (20°C,120Hz)	<table border="1"> <tr> <td>Rated Voltage(V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tanδ</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table>							Rated Voltage(V)	6.3	10	16	25	35	50	Tanδ	0.24	0.20	0.16	0.14	0.12	0.10							
Rated Voltage(V)	6.3	10	16	25	35	50																						
Tanδ	0.24	0.20	0.16	0.14	0.12	0.10																						
Load Life	After applying rated voltage with max ripple current for 1000 hrs at 85°C, the capacitors shall meet the following requirements																											
	<table border="1"> <tr> <td>Capacitance Change</td> <td colspan="6">Within ±20% of the initial value</td></tr> <tr> <td>Dissipation Factor</td> <td colspan="6">Not more than 200% of the specified value</td></tr> <tr> <td>Leakage Current</td> <td colspan="6">Not more than the specified value</td></tr> </table>							Capacitance Change	Within ±20% of the initial value						Dissipation Factor	Not more than 200% of the specified value						Leakage Current	Not more than the specified value					
Capacitance Change	Within ±20% of the initial value																											
Dissipation Factor	Not more than 200% of the specified value																											
Leakage Current	Not more than the specified value																											
Shelf Life	After Leaving capacitors under no load at 85°C for 1000hrs, they meet the characteristic requirements listed at right																											
	<table border="1"> <tr> <td>Capacitance change</td> <td colspan="6">Within ±20% of the initial value</td></tr> <tr> <td>Tanδ</td> <td colspan="6">≤200% of initial specified value</td></tr> <tr> <td>Leakage current</td> <td colspan="6">≤200% of initial specified value</td></tr> </table>							Capacitance change	Within ±20% of the initial value						Tanδ	≤200% of initial specified value						Leakage current	≤200% of initial specified value					
Capacitance change	Within ±20% of the initial value																											
Tanδ	≤200% of initial specified value																											
Leakage current	≤200% of initial specified value																											
Low Temperature Stability Impedance Rate(MAX)	<table border="1"> <tr> <td>Rated Voltage(V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>							Rated Voltage(V)	6.3	10	16	25	35	50	Z-25°C/Z+20°C	4	3	2	2	2	2	Z-40°C/Z+20°C	8	6	4	4	3	3
Rated Voltage(V)	6.3	10	16	25	35	50																						
Z-25°C/Z+20°C	4	3	2	2	2	2																						
Z-40°C/Z+20°C	8	6	4	4	3	3																						
Other	JISC-5141 EIAJ RC-2372																											

◆ CASE SIZE TABLE

ΦD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
Φd	0.45	0.5		
α	1.0			

◆ RIPPLE CURRENT MULTIPLIER

Cap(μF)	Frequency(Hz)				
	50	120	300	1K	10K~
≤47	0.75	1.0	1.35	1.57	2.0
56~470	0.8	1.0	1.23	1.34	1.5

◆ STANDARD RATINGS

size:ΦD×L(mm)

Cap(μF)	Voltage Code	6.3V		10V		16V		25V		35V		50V	
		OJ		1A		1C		1E		1V		1H	
0.1	104											4×7	1.0
0.22	224											4×7	2.3
0.33	334											4×7	3.5
0.47	474											4×7	5
1.0	105											4×7	10
2.2	225											4×7	19
3.3	335											4×7	24
4.7	475											4×7	28
10	106					4×7	28	4×7	28	5×7	32	5×7	38
22	226	4×7	34	4×7	35	4×7	39	4×7 5×7	39 48	5×7	52	6.3×7	58
33	336	4×7	40	4×7	43	4×7 5×7	45 52	5×7	58	6.3×7	65	6.3×7	72
47	476	4×7	48	4×7	45	4×7 5×7	52 65	5×7 6.3×7	62 71	5×7 6.3×7	69 81	8×7	90
100	107	5×7	78	5×7	74	5×7 6.3×7	71 98	6.3×7 8×7	81 115	6.3×7 8×7	101 145	8×9	195
220	227	6.3×7	120	6.3×7	138	6.3×7	186						
330	337	8×9	204	8×7	201	8×9	221						
470	477	8×9	243	8×9	230	8×9	228						

Maximum Allowable Ripple Current(mA rms) at 85°C 120Hz